


Current Probe



ACDC-I probe has been designed to measure a current in the 5 to 50A range: it is the ideal tester to keep under control the equipment current consumption. Its 0-5V range output is proportional to the measured voltage and makes its use very simple and straight on when connected to the RDF unit. In addition, ACDC-V probe has an optoisolated alarm contact, with programmable threshold. It has clips in and out and has been designed in a DIN rail housing, so that it can be installed directly inside electrical closets..

SPECIFICATIONS

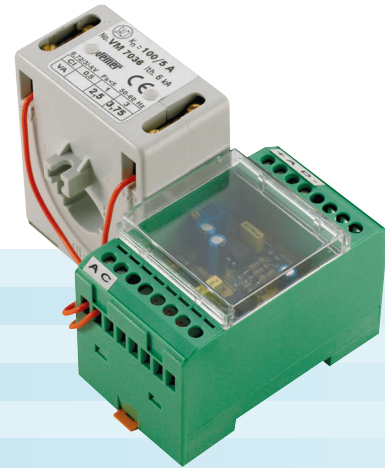

Power requirement

12V @ 70mA

Input current	AC 5 ÷ 50A
Output voltage	DC 1÷ 5V
Precision	±3%

CONVERTER Dimensions

Width	44 mm
Height	75 mm
Depth	45 mm

INDUCTOR Dimensions

Width	52 mm
Height	32 mm
Depth	73 mm

ORDERING CODES

ACDC-I ACCurrent pick-up 0-50A w/current transformer